

Specifications: **C31M Series**

Features:

- Modular Barrier Construction
- Integral Hinged Cover
- 2 and 3 Position Single Mold
- UL & CUL Recognized
- Six Terminal Options
- M3 Screws

Electrical:

Current: 10A @ 300V
 Wire Range: 16-22 AWG
 IR: >10 (500V DC)
 Operating temp: -40°C - +105°C

Materials:

Housing: Polyamide 66 (UL 94V-O)
 Terminal: Brass tin-plated
 Screw: M3 Steel, Ni plated
 Positions Available: 2-24

Specifications: **C34M Series**

Features:

- Modular Barrier Construction
- Integral Hinged Cover
- 2 and 3 Position Single Mold
- UL & CUL Recognized
- Six Terminal Options
- M3.5 Screws



Electrical:

Current: 15A @ 300V
 Wire Range: 14-22 AWG
 IR: >10 (500V DC)
 Operating temp: -40°C - +105°C

Materials:

Housing: Polyamide 66 (UL 94V-O)
 Terminal: Brass tin-plated
 Screw: M3.5 Steel, Ni plated
 Positions Available: 2-24

10A 300V 7.62 mm (.300")

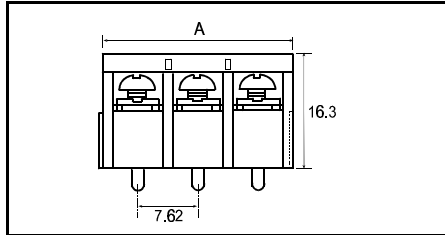
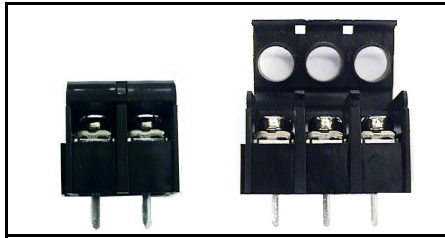


Style	Front	Side
BM11 Centerline PC		
BM14 Wire Wrap		
BM23 Solder Tail		
BM32 Extended Centerline PC		
BP32 Right Angle PC Mount		
BS11 Off-center PC Mount		

Dimensions

n= number of poles
 A=(n x 7.62)

15A 300V 9.50 mm (.375")

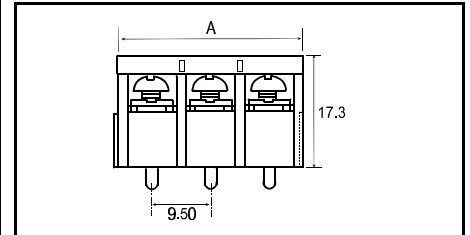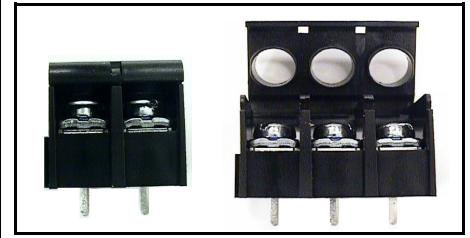

Style	Front	Side
BM11 Centerline PC		
BM14 Wire Wrap		
BM23 Solder Tail		
BM32 Extended Centerline PC		
BP32 Right Angle PC Mount		
BS11 Off-center PC Mount		

Dimensions

n= number of poles
 A=(n x 9.5)

Ordering Information

