

Specifications: **OTB-388 and 390**

Features:

- 1 to 15 positions

Electrical:

Current: 100A @ 600V

Wire Range:

Operating temp: -40°C - +90°C

Stripping Length:

Torque:

Materials:

Housing: PBT (Polybutylene Terephthalate)

Clamp: Brass, Tin, Nickel or Gold plating


Terminal: Brass, Tin, Nickel or Gold plating

Screw:





Colors Available: Black

100A 600V

11mm

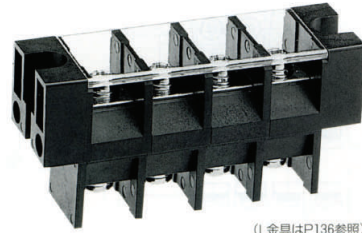

(L金具はP136参照)

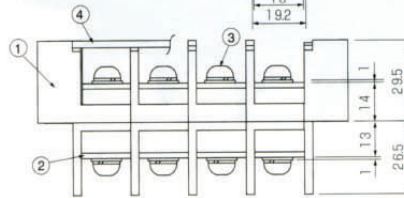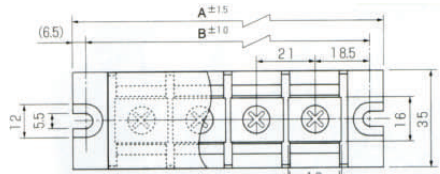

*Dimensions*






n = number of poles

$$A = (n \times 21) + 29$$

$$B = (n \times 21) + 16$$

100A 600V

11mm

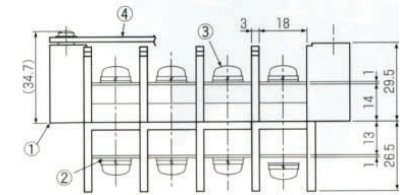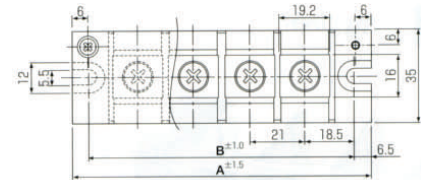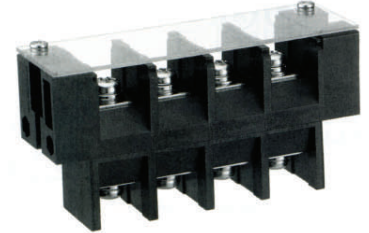

*Dimensions*

n = number of poles

$$A = (n \times 21) + 29$$

$$B = (n \times 21) + 16$$