




Specifications: **250 Series**

16A @ 400V

10.0mm

Features:

- UL Recognized
- Wire guard standard on all series
- Natural white color
- Captive screws
- Unique pluggable design

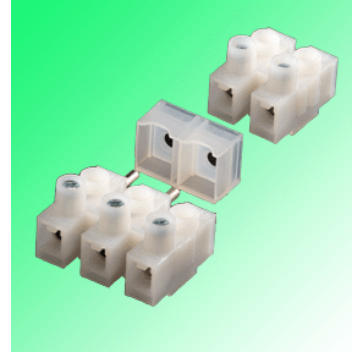

Electrical:

Current: 16A @ 450V
 Wire Range: 12-22 AWG
 Operating temp: -40°C - +100°C
 Withstanding: 2000V AC per min.
 IR: >1000MΩ (500V DC)
 Torque: 10 lb-in.

Materials:

Housing: Polyamide 66 UL94V-0
 Terminal: Brass, Nickle Plated
 Screw: M3 combo head
 Screw material: Zinc plated Steel
 Positions available: 2-12

