

Specifications: **OULP-930 Series**

Features:

- Barrier Construction
- UL Recognized
- Vertical Mount
- Two Pins per Pole
- Optional Cover Available
- M4 Screws
- High Current – Rated for 30A

Electrical:

Current: 30A @ 300V  
 Wire Range: 10-12 AWG  
 Pin Dimension: 2mm x 1mm  
 IR: >10 (1000V DC)  
 Operating temp: -40°C - +90°C

Materials:

Housing: PBT (UL 94V-O)  
 Terminal: Brass tin-plated  
 Screw: M4 Steel, Ni plated  
 Positions Available: 2-25

Specifications: **OULP-936 Series**

Features:

- Barrier Construction
- UL Recognized
- Right Angle Mount
- Two Pins per Pole
- Optional Cover Available
- M4 Screws
- High Current – Rated for 40A




Electrical:

Current: 40A @ 300V  
 Wire Range: 10-12 AWG  
 Pin Dimension: 2mm x 1mm  
 IR: >10 (1000V DC)  
 Operating temp: -40°C - +90°C

Materials:

Housing: PBT (UL 94V-O)  
 Terminal: Copper tin-plated  
 Screw: M4 Steel, Ni plated  
 Positions Available: 2-25


30A 300V 11 mm (.433")






Dimensions

n= number of poles  
 $A=(n \times 11) + 2.6$

Ordering Information

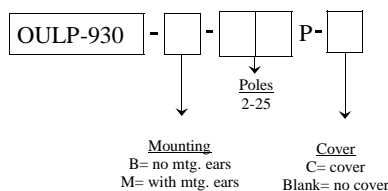

40A 300V 11 mm (.433")



Dimensions

n= number of poles  
 $A=(n \times 11) + 2.6$

Ordering Information

