

## PA Series Dual Row European Style Terminal Strips

### Specifications: Euro Style PA SERIES

#### Features:

- Wire guard standard on all series
- Color: Natural White (standard). Other colors available, Red, Blue, Green & Yellow.
- Captive screws

#### PA08HDS

Current: 17.5A @ 600V  
Wire range: 12 to 22 AWG  
Wire section(mm<sup>2</sup>): 1.5 mm<sup>2</sup>  
Centerline spacing: 8 mm  
Wire hole size: 2.9 mm  
Mounting holes: 2.9 mm  
Dimension a = (12 poles) 93.5 mm  
Dimension b = 15.5 mm

#### PA10HDS

Current: 24A @ 600V  
Wire range: 10 to 22 AWG  
Wire section(mm<sup>2</sup>): 2.5 mm<sup>2</sup>  
Centerline spacing: 10 mm  
Wire hole size: 3.45 mm  
Mounting holes: 3.6 mm  
Dimension a = (12 poles) 116.5 mm  
Dimension b = 16.5 mm

#### PA12HDS

Current: 41A @ 600V  
Wire range: 10 to 22 AWG  
Wire section(mm<sup>2</sup>): 6 mm<sup>2</sup>  
Centerline spacing: 12 mm  
Wire hole size: 4.2 mm  
Mounting holes: 3.8 mm  
Dimension a = (12 poles) 139.5mm  
Dimension b = 19.5 mm


#### PA14HDS

Current: 35A @ 300V  
Wire range: 8 to 20 AWG  
Wire section(mm<sup>2</sup>): 10 mm<sup>2</sup>  
Centerline spacing: 14 mm  
Wire hole size: 5.0 mm  
Mounting holes: 4.4 mm  
Dimension a = (12 poles) 158 mm  
Dimension b = 25.0 mm




#### Materials (All Series)

Housing: Polyamide 6,6 (UL94V-2)  
Terminal: Zinc alloy, Tin plated  
Screw: Steel, yellow chromated  
Positions available: 2 to 12  
Temperature range: -35°C to +105°C

#### Ordering Information



(02 to 12)

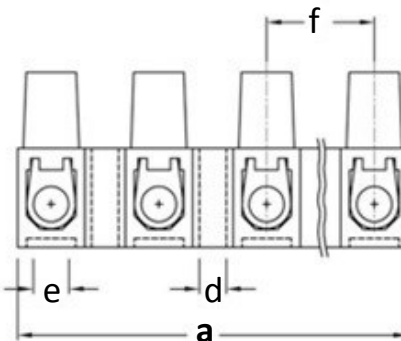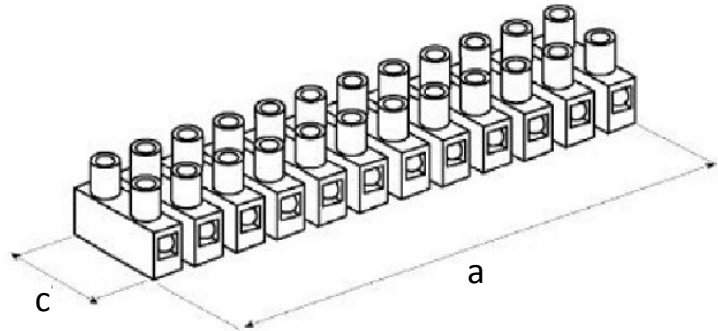

Dimensions (mm)		PA 08	PA 10	PA 12	PA 14
a	Length	93.5	116.5	139.5	158.0
b	Height	15.5	16.5	19.5	25.0
c	Width	17.7	20	23.8	25.6
d	Fixing hole	2.9	3.5	3.6	4.4
e	Wiring hole	2.9	3.45	4.2	5.0
f	Pitch	8	10	12	14
g	Screw	M2.6x5.4	M3x6	M3.5x7.2	M4.0x9



Custom Legends Available

