


SCOPE: This specification applies to – DG99-A-XXP-13-00A(H) – Terminal Block

SPECIFICATIONS:

Number of poles: 2 - 12
 Pitch: 17.45mm
 Voltage: 600V
 Current: 75A
 Wire size: 14 - 4 AWG
 Available approvals: UL, CSA

Operating temperature range: - 40°C to +125°C
 Stripping Length: 10mm
 Contact resistance: <15 mOhm
 Insulation resistance: >1 GOhm

Screw: M5, Zinc plated steel
 Contacts: Tin-plated copper alloy
 Housing: PC (UL94V-0)
 Color: Black (Standard)

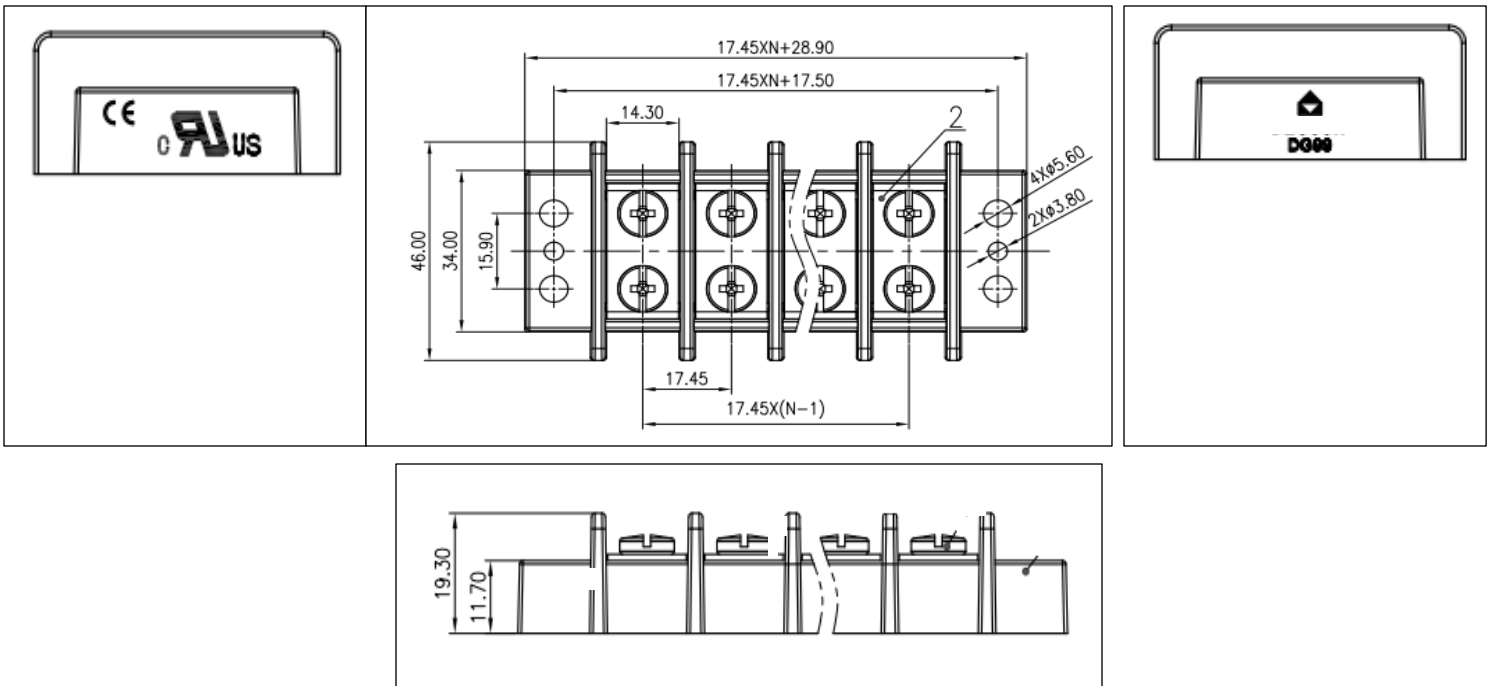

<p>BlockMaster Confidential and Proprietary</p>	<p>BlockMaster Electronics 1400 Howard Street Elk Grove Village, IL. 60007 Toll Free: 800-595-8881 FAX: 847-956-1690 www.blockmaster.com</p>
<p>All dimensions are in MM unless otherwise specified</p>	
<p>Drawing Number: DG99-A-XXP-13-00A(H)</p>	<p>Terminal Block</p>
<p>Date: 6/11/2017</p>	<p>THE INFORMATION DISCLOSED HEREIN WAS ORIGINATED BY AND IS THE PROPERTY OF BLOCKMASTER ELECTRONICS INC. AND EXCEPT FOR USE EXPRESSLY GRANTED TO THE UNITED STATES GOVERNMENT BLOCKMASTER ELECTRONICS INC. RESERVES ALL PATENT PROPRIETARY DESIGN, USE, SALE, MANUFACTURING AND PRODUCTION RIGHTS THERETO. THIS DOES NOT APPLY TO VENDOR.</p>