
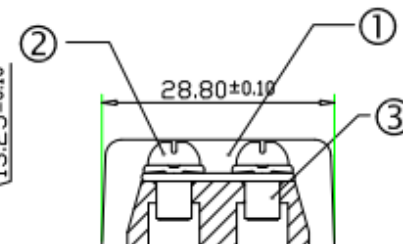


# Barrier type terminal block

## SPECIFICATIONS

- ① Housing Material: Phenolic , Black
- ② Screw: M3.5 Nickel Plated Steel
- ③ Terminals: Tin Plated Brass

Screws Torque: 12 In-Lb  
 Wire Range: 12~18 WG  
 Rated: 20 Amperes.AC250V  
 Operation Temperature: -40°C~+160°C  
 Insulation withstands volt: AC2000V min  
 Insulation resistance: >1000MΩ or more at DC500V

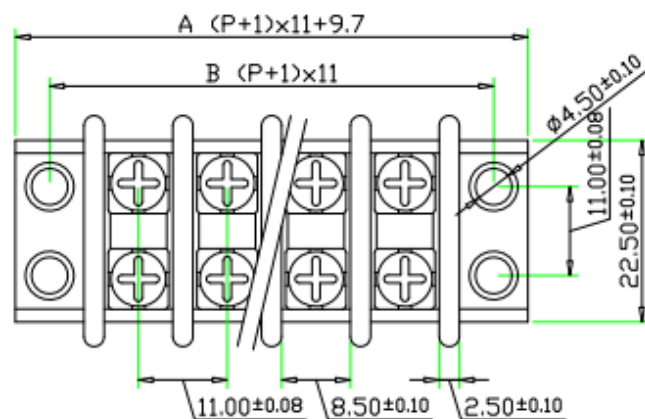

## Part Number:

HD-20A-PH

Pole Size 2~26P

Tolerance ± 0.5

<b>POLE</b>	<b>2</b>	<b>3</b>	<b>4</b>	<b>5</b>	<b>6</b>	<b>7</b>	<b>8</b>	<b>9</b>	<b>10</b>	<b>11</b>	<b>12</b>	<b>13</b>	<b>14</b>	<b>15</b>
A	42.7	53.7	64.7	75.7	86.7	97.7	108.7	119.7	130.7	141.7	152.7	163.7	174.7	185.7
B	33	44	55	66	77	88	99	110	121	132	143	154	165	176
<b>POLE</b>	<b>16</b>	<b>17</b>	<b>18</b>	<b>19</b>	<b>20</b>	<b>21</b>	<b>22</b>	<b>23</b>	<b>24</b>	<b>25</b>	<b>26</b>			
A	196.7	207.7	218.7	229.7	240.7	251.7	262.7	273.7	284.7	295.7	306.7			
B	187	198	209	220	231	242	253	264	275	286	297			

文件發行  
2009.8.21

林姿伶

