

PA Series Dual Row European Style Terminal Strips

Specifications: Euro Style PA SERIES

Features:

- Wire guard standard on all series
- Color: Natural White (standard). Other colors available, Black, Red, Blue, Green & Yellow.
- Captive screws

PA08HDS

Current: 25A @ 600V
Wire range: 12 to 22 AWG
Wire section(mm²): 1.5 mm²
Centerline spacing: 8 mm
Wire hole size: 2.9 mm
Mounting holes: 2.9 mm
Dimension a = (12 poles) 93.5 mm
Dimension b = 15.5 mm

PA10HDS

Current: 30A @ 600V
Wire range: 10 to 22 AWG
Wire section(mm²): 2.5 mm²
Centerline spacing: 10 mm
Wire hole size: 3.45 mm
Mounting holes: 3.6 mm
Dimension a = (12 poles) 116.5 mm
Dimension b = 16.5 mm

PA12HDS




Current: 35A @ 600V
Wire range: 10 to 16 AWG
Wire section(mm²): 6 mm²
Centerline spacing: 12 mm
Wire hole size: 4.2 mm
Mounting holes: 3.8 mm
Dimension a = (12 poles) 139.5 mm
Dimension b = 19.5 mm

PA14HDS

Current: 50A @ 300V
Wire range: 8 to 20 AWG
Wire section(mm²): 10 mm²
Centerline spacing: 14 mm
Wire hole size: 5.0 mm
Mounting holes: 4.4 mm
Dimension a = (12 poles) 158 mm
Dimension b = 25.0 mm

Materials (All Series)

Housing: Thermoplastic (UL94V-2)
Terminal: Brass, Nickel plated
Screw: Zinc plated Steel, blue chromated
Positions available: 2 to 12
Temperature range: -40°C to +105°C
Withstand Voltage: 2200V

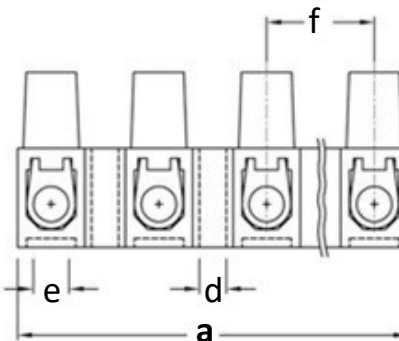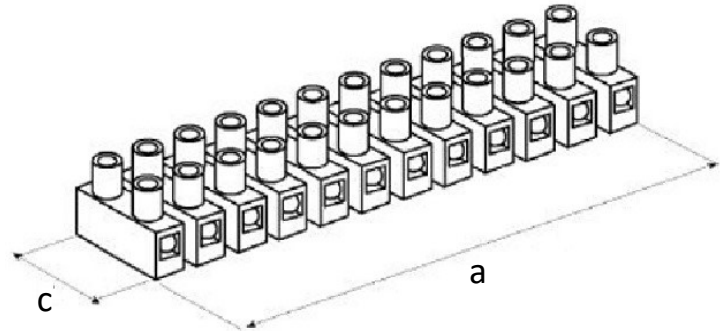

Dimensions (mm)		PA 08	PA 10	PA 12	PA 14
a	Length	93.5	116.5	139.5	158.0
b	Height	15.5	16.5	19.5	25.0
c	Width	17.7	20	23.8	25.6
d	Fixing hole	2.9	3.5	3.6	4.4
e	Wiring hole	2.9	3.45	4.2	5.0
f	Pitch	8	10	12	14
g	Screw	M2.6x5.4	M3x6	M3.5x7.2	M4.0x9



Custom Legends Available

