

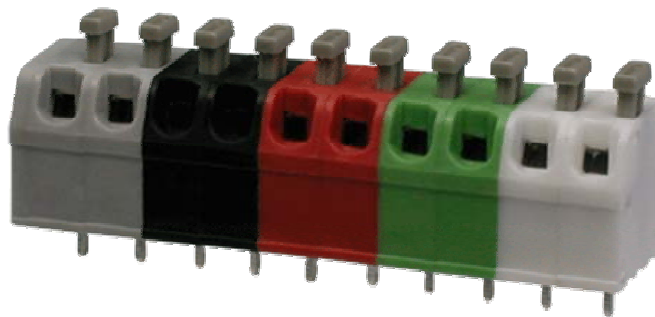
Specifications: **USL-5SAB1**

10A @ 300V 5.0mm

5.0 mm

Features:

- Screwless with button release
- Angled wire insertion
- Compact design
- Single solder pin per pole
- Custom color configuration available

*Electrical:*

Current: 10A @ 300V
 Wire Range: 16-26 AWG
 Pin dimension: 0.8mm x 0.4mm
 Dielectric: 4kV
 Operating Tem: -40°C to +105°C
 Stripping Len: 9mm

Materials:

Housing: Polyamide 6,6 (UL94V-0)
 Contact Spring: Stainless steel
 Colors: Gray (standard)

Marking:

Adhesive marking strips not available.
 Ink marking available by request.

