
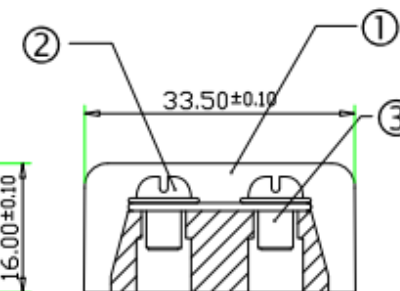


Barrier type terminal block

SPECIFICATIONS

- ① Housing Material: Phenolic , Black
- ② Screw: M4.0 Nickel Plated Steel
- ③ Terminals: Tin Plated Brass

Screws Torque: 15.7 In-Lb
 Wire Range: 10~18 WG
 Rated: 40 Amperes.AC600V
 Operation Temperature: -40°C~+160°C
 Insulation withstands volt: AC2000V min
 Insulation resistance: >1000MΩ or more at DC500V

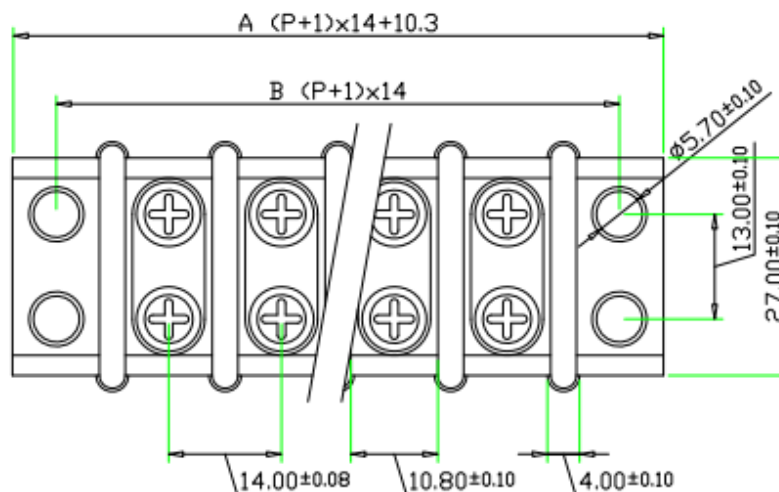

Part Number:

HD-30A- PH

Pole Size 2~24P

Tolerance ± 0.5

POLE	2	3	4	5	6	7	8	9	10	11	12	13	14	15
A	52.3	66.3	80.3	94.3	108.3	122.3	136.3	150.3	164.3	178.3	192.3	206.3	220.3	234.3
B	42	56	70	84	98	112	126	140	154	168	182	196	210	224
POLE	16	17	18	19	20	21	22	23	24					
A	248.3	262.3	276.3	290.3	304.3	318.3	332.3	346.3	360.3					
B	238	252	266	280	294	308	322	336	350					

文件發行
 2009. 8 .21
 林安伶

